


## Features

- Innovative design simplifies installation to save time and money
- Unique thumb spring retainer allows for ease of positioning on bar joist
- Snap-off bolt head helps enable easy installation and inspection of seismic sway braces

## Product Listings

- Meets NFPA®-13 requirements for seismic sway bracing
- Exceeds 10" (250 mm) UL load rating in all directions
- FM Approved for design loads up to 4,300 lbs. (18,682 N) in all directions

Products meet NFPA requirements for seismic applications!



## Installation is easy...



**Step 1:**  
Pull back thumb spring and select spot on bar joist to mount adaptor.




**Step 2:**  
Release thumb spring, allowing it to grip bar joist. Finger tighten the bolts to keep adaptor firmly in place.





**Step 3:**  
Tighten bolts until bolt heads shear off.



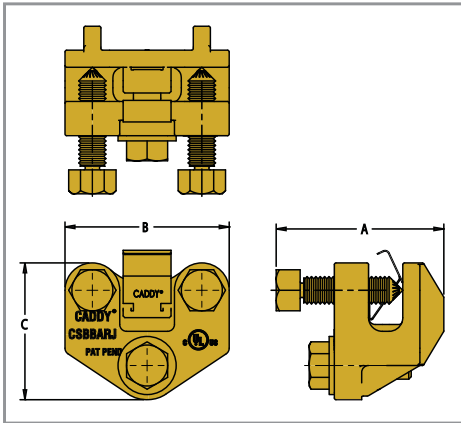

- For use in lateral and longitudinal sway bracing applications
- Standard electro-galvanized finish provides superior corrosion protection
- Hot-dipped galvanized finish is also available as special order

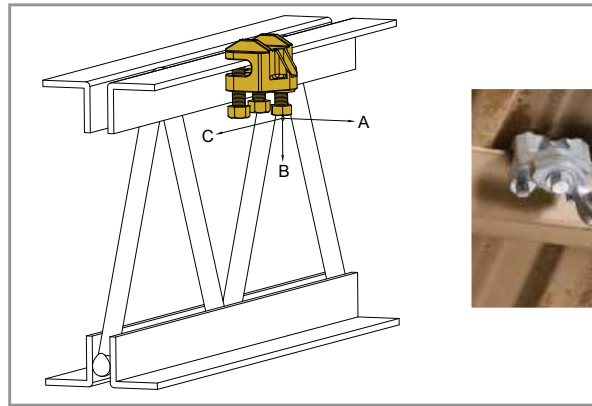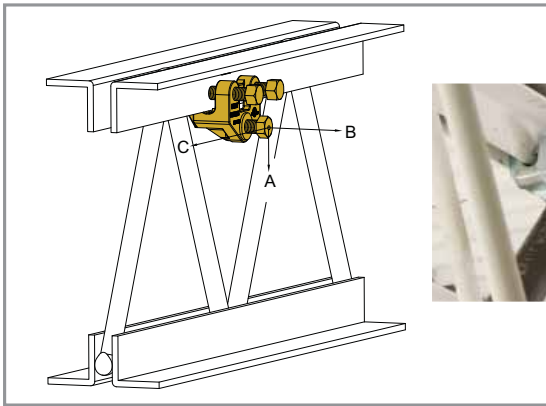

## Specifications

Part Number	Description	UL Listed Load Direction A/B lbs (N)	UL Listed Load Direction C lbs (N)	FM Approved Load Direction A/B/C lbs (N)	Flange Thickness in (mm)	A in (mm)	B in (mm)	C in (mm)
CSBBARJEG	Bar Joist Adaptor EG	3,740 (16,636)	3,000 (13,344)	4,200 (18,682)	1/4 - 1/2 (6.4 - 15.9)	2 (50.8)	3 (76.2)	2-1/2 (63.5)

UL is a registered trademark of Underwriters Laboratories, Inc. NFPA is a registered trademark of the National Fire Protection Association.

**WARNING**  
 ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright ©2009 ERICO International Corporation. All rights reserved.  
 CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.