

STRAIGHT PATTERN TEST AND DRAIN VALVE

TEST AND DRAIN VALVE
THE TEST AND DRAIN VALVE FOR USE AS SPECIAL TYPE DRAIN FITTING FOR FIRE PROTECTION SERVICE IN ACCORDANCE WITH STANDARD FOR INSTALLATION OF SPRINKLER SYSTEMS.



Brass Construction
TEST, DRAIN and OPEN Positions
Vertical or Horizontal Installation

THREADED TO ANSI B1.20.1

UL AND FM APPROVED

BRASS ASTM C85700

WORKING PRESSURE 175PSI

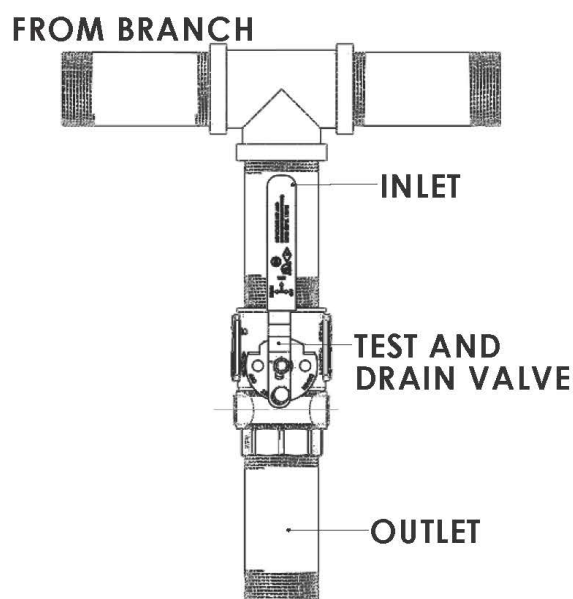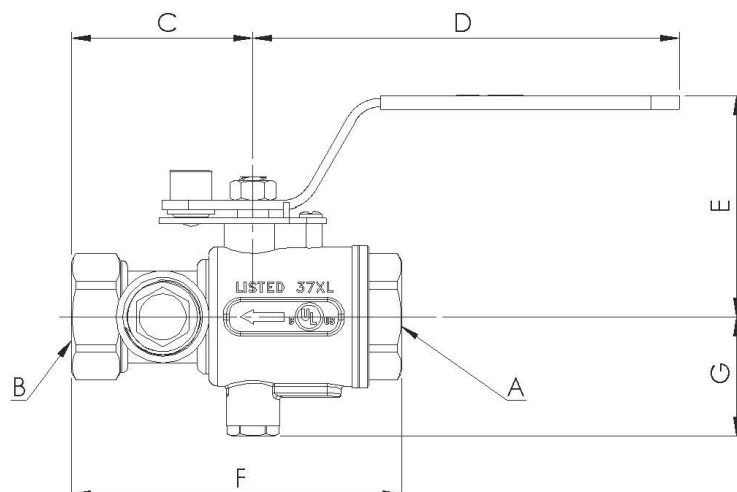

	SIZE	APPROVED	A INLET	B OUTLET	C	D	E	F	G
8090100	1"	FM UL	1"NPT	1"NPT	62.8mm	148.3mm	76.7mm	114.5mm	41.5mm
8090114	1-1/4"	FM UL	1-1/4"NPT	1-1/4"NPT	68.3mm	148.3mm	79.2mm	123mm	46mm